

07-28-00

A 15

07/27/00
JC866 U.S. PTO

Date of Deposit: July 27, 2000

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>	Attorney Docket No.	CBS 2000-01
	First Inventor or Application Identifier	Kenneth John Aagaard
	Title	VIDEO SYSTEM AND METHOD OF OPERATING*
	Express Mail Label No.	EL701533036US

JC873 U.S. PTO
09/626568
07/27/00

APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents.</small>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) <small>(Submit an original and a duplicate for fee processing)</small> 2. <input checked="" type="checkbox"/> Specification [Total Pages 16] <small>(preferred arrangement set forth below)</small> - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure 3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 8] 4. Oath or Declaration [Total Pages 3] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) <small>(for continuation/divisional with Box 16 completed)</small> i. <input type="checkbox"/> DELETION OF INVENTOR(S) <small>Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).</small>	5. <input type="checkbox"/> Microfiche Computer Program (Appendix) 6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies ACCOMPANYING APPLICATION PARTS 7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small> 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small> 13. <input type="checkbox"/> * Small Entity Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input type="checkbox"/> Other:

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label or ☒ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name	Robert P. Lenart				
Address	Eckert Seamans Cherin & Mellott, LLC 600 Grant Street, 44th Floor				
City	Pittsburgh	State	PA	Zip Code	15219
Country	US	Telephone	412/566-1252	Fax	412/566-6099

Name (Print/Type)	Robert P. Lenart	Registration No. (Attorney/Agent)	30,654
Signature	<i>Robert P. Lenart</i>	Date	July 27, 2000

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231 DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

* A VIDEO SYSTEM

VIDEO SYSTEM AND METHOD OF OPERATING A VIDEO SYSTEM**BACKGROUND OF THE INVENTION**

This invention relates to video systems and methods of operating such systems, and more particularly, to video systems employing multiple cameras to produce images of a moving object of interest from different spatial perspectives.

5 In the televised broadcast of live events, it is frequently desirable to replay portions of the events for further analysis and/or viewer enjoyment. The familiar instant replay feature used in televised sporting events has been used to review sports plays. By replaying video taken by cameras at different locations, it is occasionally possible to obtain a better view of the event than was provided by the
10 original broadcast.

 Multiple camera imaging has been the subject of several issued patents. For example, United States Patents No. 5,729,471 and 5,745,126 disclose a multiple camera television system in which an object of interest can be viewed from multiple spatial perspectives using cameras that provide different views of a
15 scene.

 However, such multiple camera television systems have typically utilized fixed position cameras. In the telecast of live events, objects of interest in the scene move and it is desirable to be able to move the camera to follow movements of particular objects. When replaying video clips of events such as
20 sporting events it is further desirable to be able to view the events from multiple spatial perspectives. The present invention provides a camera system and method of operation of the camera system that uses multiple cameras to produce video images from multiple spatial perspectives, and permits the replay of those images to view an event from the different spatial perspectives.

25 **SUMMARY OF THE INVENTION**

A video imaging system constructed in accordance with this invention includes a master video camera for producing video images of a moving object of interest, a plurality of additional video cameras each positioned at a different location

for producing additional video images of the object of interest from different spatial perspectives, and a control system for controlling the additional video cameras to track the object of interest imaged by the master video camera.

5 The system generates video images using a method comprising the steps of producing a master video image of a moving object of interest, producing additional video images of the object of interest from different spatial perspectives, and controlling size of the object of interest in the additional video images in response to the size of the object of interest in the master video image.

10 The invention further encompasses a method of presenting a video image comprising the steps of producing a plurality of video images of an object of interest from a plurality of spatial perspectives, displaying one of said video images for a period of time, selecting a frame in the displayed video image, and switching the displayed video image among a plurality of corresponding frames of said plurality of video images to display the object of interest from multiple spatial perspectives,
15 giving the illusion of a single camera moving around the frozen object(s).

This invention also encompasses the recording of point source sound by placing microphones at the camera locations such that the microphones receive sound waves originating within of the field of view of the cameras, and processing audio signals produced by the microphones to produce an audio output signal
20 representative of sound being produced at a particular location in the area occupied by an event being recorded.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic representation of a camera system constructed in accordance with the present invention;

25 Figure 2 is block diagram of the camera system of Figure 1 showing additional components not shown in Figure 1;

Figure 3 is schematic representation of a camera that can be used in the system of Figure 1;

Figure 4 is a schematic representation of the camera system of Figure
30 1 with various locations of objects of interest identified in the area of interest;

Figure 5 is a schematic representation showing the various parameters that are measured or calculated when practicing the method of the present invention;

Figures 6a, 6b, 6c, 6d and 6e are frames of video images that illustrate the operation of the present invention; and

Figures 7a, 7b, 7c, 7d and 7e are additional frames of video images that illustrate the operation of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

This invention uses a master/slave camera system to record and playback images produced by cameras positioned to provide different spatial perspectives of a scene. While the following description refers generally to video cameras, it should be understood that such cameras could be standard resolution cameras, high definition video cameras, and other devices capable of producing video image signals. Referring to the drawings, Figure 1 is a schematic representation of a camera system 10 constructed in accordance with the present invention as it can be applied to a television broadcast of an American football game. The system includes a plurality of television cameras 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68 and 70 positioned at different locations around the field of play 72. While this example shows the use of thirty cameras, it should be understood the invention is not limited to a particular number of cameras, and a greater or smaller number of cameras can be used within the scope of the invention. The cameras are located at spaced positions to provide video images of various objects of interest in the field of play from various spatial perspectives.

Figure 2 is block diagram of the camera system of Figure 1 showing additional components not shown in Figure 1. While only three cameras are shown in Figure 2, it will be understood that all of the cameras would be connected to the computer 84 in a manner similar to that shown in Figure 2. In Figure 2, camera 12 is shown as the master camera, and is coupled to a camera monitoring unit 74 that monitors the various parameters of the master camera that will be needed to coordinate the operation of the additional cameras 14 – 70. The illustrated additional cameras 42, 70 are shown to be coupled to camera positioning and monitoring units

76 and 78. The positioning and monitoring units 76 and 78 receive control signals from the computer and control the position, focus and framing of the additional cameras in response to the control signals. The positioning and monitoring units 76 and 78 also send signals to the computer that are representative of the operational status of the additional cameras. Master camera 12 and its associated monitoring unit 74 are connected, either by wires 80 and 82, or other suitable signal carrying media such as fiber optics or radio links, to a computer 84, or other signal processing device for performing the system control, processing and storage functions. Similarly cameras 42 and 70, and their associated positioning and monitoring units 76 and 78 are connected, either by wires 86, 88, 90 and 92, or other suitable signal carrying media such as fiber optics or radio links, to the computer 84, so that operation of the cameras can be coordinated and video signals from the cameras can be recorded for future viewing and/or additional processing. Audio information collected by microphones at the camera locations can also be transmitted to the computer or another signal processing device by the same signal carrying media or by separate signal carrying media.

To operate the system, the master camera is used to follow an object of interest in the event. For example, the object of interest might be a football or a particular player. As the master camera follows the object of interest, information signals representative of the camera's movements, focus and framing, are sent from the monitoring unit 74 to the computer 84. The computer processes this information and provides control signals to the other cameras thereby directing the other cameras to follow the object of interest. A user interface 94 is connected to the computer by wire 96 or another suitable control channel and used to direct the computer to provide a video output on line 98 for display 100, and/or for further processing or transmission.

In order to achieve coordinated operation of all of the cameras, the control system must be provided with information about each camera, such as its location with respect to the master camera, vertical and horizontal orientation, field of view, focus distance, etc. Figure 3 is a schematic representation of one of the additional cameras 42 in a system constructed in accordance with the invention. Figure 3 shows the various parameters that must be known, such as the location of the

camera shown as coordinates x, y and z, and parameters that can be controlled by the associated camera positioning and monitoring device, such as the pan direction 102, the tilt direction 104, and the rotational angle 106. The pan, tilt and rotational angles of the individual cameras can be controlled by mounting the cameras on a robotic platform with the position of the platform being controlled automatically by various known arrangements of servo motors and mechanical couplings. The focus and zoom functions can also be controlled remotely in accordance with known remote control technology, such as the Pro/Four Video Products 2000RP remote positioner.

The location of the cameras with respect to each other (or with respect to the scene to be imaged) would be determined using known techniques, such as by using a global positioning system or using triangulation to determine the location of the cameras with respect to predetermined landmarks in the scene, such as the corners of a football field. Once the locations of all of the cameras are known, this information can be combined with information retrieved from the master camera, such as the distance from the master camera to an object of interest in the scene, to determine the movement, zoom and focus parameters for the additional cameras. This information will be supplied by the computer to the individual additional camera monitoring and control units to focus the additional cameras and to adjust the framing so that the object of interest is substantially the same size in each of the video images produced by the cameras.

In the preferred embodiment, the master camera is manually controlled to focus on, and follow an object of interest. The object of interest should be positioned within a portion of the camera's field of view, referred to as the "sweet spot". The sweet spot is a portion of the camera's field of view that contains the object of interest. The sweet spot would typically be near the center of a camera's field of view, but through the use of appropriate signal processing, other parts of the field of view could be used. The framing of an object at the sweet spot would change in relation to the action being shot. For example, at the beginning of a football play, the shot might be wider to include most of the players, but as the focus is narrowed to one or two players, so would the framing of the master camera, and thus the slave cameras.

As the master camera tracks the object of interest, the other cameras are automatically controlled to track the object of interest in a manner that permits subsequent viewing of the various images recorded by the cameras. That is, the automatically controlled additional cameras should focus on the object of interest and
5 adjust the field of view so that the object of interest is substantially the same size in the images recorded by the various cameras.

In the preferred embodiment, using data from the master camera, the invention will calculate the position of the object of interest, for example using an X-Y-Z coordinate system, where X and Y are perpendicular axes in a horizontal plane
10 upon which the event being observed occurs. The Z direction is normal to the horizontal plane. Then all of the additional cameras will move in unison to track the object that is being tracked by the master camera. The zoom and focus of the additional cameras will be controlled so that the object of interest in each of the video images will be substantially the same size. During the tracking, video images
15 produced by each camera will be stored in the computer or a similar storage device. In the preferred embodiment, the images would be stored in a digital disc recorder, such as the Pinnacle Thunder or Tektronics Profile.

The operation of the invention can be further described by referring to Figure 4. In Figure 4, assume that camera 12 is the master camera and is initially
20 focused on an object of interest, such as a football player at location 108. By using known locations of the additional cameras, the distance D1 from camera 12 to location 108 and the framing size (or zoom) information for camera 12, the computer can calculate the information needed to direct all of the additional cameras to focus on the object of interest and to adjust the frame size so that the object of interest appears
25 to be substantially the same size in the video images produced by each of the cameras. This calculated information is then sent to the camera positioning units associated with each of the additional cameras, and the positioning units move the cameras to the correct position.

If the object of interest moves to location 110, the tilt angle of the
30 master camera will change to following the object. If the field of view is not changed at the master camera, the object of interest will appear smaller due the increased distance D2 between the master camera and the object of interest. Camera 42, which

is located directly across the field from the master camera will be directed to change its tilt angle to follow the object of interest and will also have to increase its field of view (zoom out) so that the object of interest is substantially the same size in the image produced by camera 42 as it is in the image produced by the master camera.

- 5 All of the other cameras will be directed to change their tilt angle, pan angle and zoom to image the object of interest from their respective spatial perspectives and to ensure that the object of interest is substantially the same size in their respective images as in the image produced by the master camera.

10 If the object of interest subsequently moves along line 112 toward point 114, the distance between the object of interest and camera 12 does not change, and assuming the that the framing size remains constant, the size of the object in the image produced by camera 12 will remain the same. However, since the distance between the object of interest and all of the other cameras has changed, all of the other cameras will have to adjust their zoom to keep the size of the object of interest
15 in their images substantially the same as in the image produced by the master camera.

An example of the method used to locate an object of interest and control the slave cameras will now be described with respect to the use of the invention in the broadcast of a sporting event. First a Cartesian coordinate system will be defined in which the field of play lies in an X,Y plane, with the Z direction
20 being perpendicular to the plane. The master camera will be manually controlled to focus on an object of interest, also referred to as a target. The target location on the field will be derived from the master camera's pointing characteristics. Pan, tilt and zoom information from the master camera will be monitored, in the preferred embodiment using optical encoders, and fed back to the computer system. The
25 computer system will then calculate the location of the target in X,Y space. A Z coordinate can be assigned to the focal plane of field to provide the desired framing. For example, a Z coordinate of 4 feet above ground level would be appropriate for systems covering a football game.

Figure 5 is a schematic representation of the relationships between a
30 camera 12 and the target 116. First the target's location with respect to the master camera can be determined. The master camera tilt angle (CT) can be used to calculate the line of sight distance, or focal distance (FD), and ground distance (GD) from the

master camera, using the following formulas where Z is the height of the master camera above the X,Y plane. $Z/\text{TAN}(90-CT)=GD$

$$Z^2 + GD^2 = \sqrt{FD}$$

Once the focal distance and ground distance are known, the camera pan information (CP) can be used to calculate the X and Y coordinates of the target. This is determined by finding the difference in the X position between the master camera location and the target location (DX) and the difference in the Y position between the master camera location and the target location (DY) using the following equations.

$$\begin{aligned} GD * \text{SIN}(CP) &= DX \\ GD * \text{COS}(CP) &= DY \end{aligned}$$

Then the camera's position in the world (CX,CY) can be added to (DX,DY) to obtain the real world target coordinates of (TX,TY).

Zoom information for the master camera can be arrived at in two ways. Either by the computer telling the camera zoom what field of view is wanted or the computer getting the information from the camera zoom. In this example we will have the computer control zoom based on field of view (FV). The focal angle (FA) of the lens can be found using the formula:

$$90 - \text{ATAN2}(FV/2, FD) = FA$$

The above steps provide all of the information needed from the master camera. This information can now be used to control the "slave" cameras. First, the robotic slave camera positioning system must be told where to point. The position of the slave camera in the world coordinates is (CX,CY,Z).

The difference between the slave camera position and the target position (DX, DY) in the X,Y plane can be determined using the following formulas:

$$TX - CX = DX$$

$$TY - CY = DY$$

The difference in positions in the Z direction is found by subtracting the Z coordinate of the target from the Z coordinate of the camera. Then the ground distance (GD) between the slave camera and the target can be found using the formula:

$$\sqrt{(DX^2 + DY^2)} = GD$$

The Camera Tilt (CT) angle can be found using the formula:

$$90 - \text{ATAN2}(GD, Z) = CT$$

The Camera Pan (CP) angle can be found using the formula:

5
$$90 - \text{ATAN2}(DX, DY) = CP$$

The Camera Focal Distance (FD) can be found using the formula:

$$\sqrt{(GD^2 + Z^2)} = FD$$

The Focal Angle (FA) can be found using the formula:

$$90 - \text{ATAN2}(FV/2, GD) = FA$$

- 10 The CT, CP, FD, and FA are then sent to the slave camera robotic positioning system, which will cause the slave camera to track the target and match the framing of the master camera.

- This invention is particularly suitable for providing improved video replay images. The video images of an event of interest from a plurality of the
- 15 cameras will be stored in a suitable storage medium, such as a digital data file or videotape system. To produce a replay of an event, one of the video images will be played until a particular video frame of the event of interest is depicted in the video. At that time, the video will be frozen to display the particular video frame. The display will then switch among frames in the video images that were produced by the
- 20 other cameras. The frames of the video images that were produced by the other cameras may be frames that correspond in time to the originally selected frame, or they may be other frames, such as those recorded at successive instants of time. Since the video images have been recorded from different spatial locations, that in the preferred embodiment encompass views surrounding the scene, this will effectively
- 25 rotate the object being displayed. The cut between video sources can be done in a number of well-known ways, for example using a routing switcher such as the Grass Valley SMS 7000 or the Pesa Jaguar. Once a desired degree of rotation has been achieved, the video images from the camera positioned at the location viewing the desired angle of view can be played to continue full motion video.

- 30 As an alternative to rotation of a frozen image, for some applications, such as where the a single object of interest, or a small number of objects are located

near the sweet spot, moving video can be displayed by switching among the video images from the various cameras.

Figures 6a, 6b, 6c, 6d and 6e are simulated frames of video images that illustrate the operation of the present invention in a video replay mode. Assume that video images produced by camera 26 in Figure 1 are displayed on a monitor. The viewer wishes to see if player 118 has stepped on sideline 120. As the player approaches the sideline, a particular frame of the video produced by camera 26 is selected and shown in Figure 6a. In the frame of Figure 6a, the viewer cannot see if the player's left foot has hit sideline 120. To achieve a better view, the corresponding frame produced by camera 34 is shown in Figure 6b. In this frame it is apparent that the player's foot has touched the line 120. Figures 6c, 6d and 6e shows the corresponding frame from the video recorded by cameras 42, 48 and 56 respectively. It should be apparent that by switching among corresponding frames of images recorded by the various cameras, the image of the player is effectively rotated on the display. Once a particular frame has been selected from the available frames, the full motion video can be resumed by running the video recorded from the camera that recorded the selected frame.

Figures 7a, 7b, 7c, 7d and 7e are simulated frames of video images that further illustrate the operation of the present invention. In these frames, the viewer desires to determine if the player 122 has crossed line 124 at the time that he crossed the sideline 126. Figure 7a is a frame from the image recorded by camera 26. From the spatial perspective of camera 26, the viewer cannot tell if the player has crossed line 124. Figure 7b is a frame recorded from camera 32. Here again, the viewer cannot tell if the player has crossed line 124. By switching to the frame recorded by camera 36, as shown in Figure 7c, the viewer can clearly see that the play is to the left of line 124. Figures 7d and 7e show corresponding frames recorded from cameras 48 and 58, respectively. Figures 7a, 7b, 7c, 7d and 7e again illustrate how the invention uses a frozen image to effectively rotate the image on the display to provide information that might not be obtained from a fixed camera position.

With additional signal processing, synthesized video images can be created by interpolating information in images taken by different cameras to produce views from spatial perspectives where cameras do not actually exist. Such synthesis

can result in smoother transitions between images when the object of interest is rotated in the display. For example, interpolation software available from Realviz Corporation could be used to perform the necessary image interpolation.

This invention can be used as part of a live broadcast or as a replay device, giving a 360° view of an object or objects. To use the invention in connection with a sporting event, cameras can be installed either at field level or at some point above the field level such as the mezzanine level of a stadium. The video images provided by the camera system of this invention are similar to a virtual camera that can revolve around an object, as the object remains frozen. The image produced by the master camera can be framed wide or tight, and the images produced by the additional cameras will automatically track the image produced by the master camera.

This invention further encompasses the detection, recording and playback of point specific audio. By placing microphones at some or all of the camera locations such that the microphones receive sound from the direction of the field of view of the cameras, audio signals can be produced and fed to the computer for processing. Since the computer will have information concerning the position of the microphones, the audio signals produced by these microphones can be processed to produce an audio output signal representative of sound being produced at a particular location in the area occupied by the event being recorded. For example, since the distance from the camera to the object of interest can be calculated as shown above, if a microphone is mounted at the camera location, the time required for sound produced in the vicinity of the object of interest to reach the microphone location can be calculated. Since the microphones are located at various distances with respect to the object of interest, the sound produced in the vicinity of the object of interest will reach the microphones at different times. By adding a time delay to the signals produced by the microphones to account for the differences in distance from the microphones to the vicinity of the object of interest, and subsequently combining the signals (for example by adding the signals), the sound produced in the vicinity of the object of interest can be recovered. This will produce an audio signal having a higher signal to noise ratio than an audio signal produced by any of the individual microphones. The microphones can be connected to the computer or another signal processing device using an arrangement similar to that shown in Figure 2.

With this invention, a director of a televised sporting event can produce replays of the events that permit an in-depth analysis of the action by combining information contained in video images taken from different spatial perspectives. The invention also provides the ability to change video framing during
5 recording of an event.

In addition to use in broadcasts of football games as shown in the preferred embodiment, this invention has many practical applications, such as, golf swing analysis, and telecasts of basketball, gymnastics, track and field, boxing and entertainment events. Another example is the use of this invention in the movie
10 industry. By using high definition video cameras in place of traditional film cameras to record a scene from a multiple of perspectives, a more complete record of the scene can be obtained, providing for more options in editing of the video for incorporation into a final video sequence. This could reduce the number of times that a scene would have to be recorded to obtain a desired video sequence.

15 While the present invention has been described in terms of what is at present believed to be its preferred embodiment, it will be apparent to those skilled in the art that numerous changes may be made to the preferred embodiment without departing from the scope of the invention as defined by the following claims.

What is claimed is:

1. A video imaging system, the system comprising:
a master video camera for producing video images of a moving object of interest;
5 a plurality of additional video cameras each positioned at a different location for producing additional video images of the object of interest from different spatial perspectives; and
a control system for controlling said additional video cameras in response to the master video camera to follow movement of the object of interest.
- 10 2. The video imaging system of claim 1, further comprising:
a monitoring unit for transmitting signals representative of an operating status of the master camera to the control system; and
a plurality of positioning units for positioning the additional cameras in response to control signals from the control system.
- 15 3. The video imaging system of claim 1, further comprising:
a recording system for recording the video images produced by the master camera and the additional cameras; and
a user interface for selecting particular ones of the video images for display.
- 20 4. The video imaging system of claim 3, wherein the user interface permits the sequential selection of individual frames in the video images.
5. The video imaging system of claim 1, wherein the control system comprises:
a pan control, a tilt control, a focus control and a frame control for
25 each of the additional video cameras; and
a computer processor for coordinating operation of the pan control, the tilt control, the focus control and the frame control for each additional video camera in response position and focus parameters of the master video camera.
6. The video imaging system of claim 1, further comprising:
30 a plurality of microphones positioned at the locations of predetermined ones of the additional cameras; and

the microphones being coupled to the computer to supply signals representative of audio signals received by the microphones.

7. A method of generating a video image, said method comprising the steps of:

- 5 producing a master video image of a moving object of interest;
 producing additional video images of the object of interest from different spatial perspectives; and
 controlling characteristics of said additional video images in response to the master video image to track the object of interest.

- 10 8. The method of claim 7, further comprising the steps of:
 storing the master video images and the additional video images; and
 selecting particular ones of the video images for display.

9. The method of claim 7, wherein the step of selecting particular ones of the video images for display comprises the step of:
15 sequentially selecting individual frames in the video images.

10. The method of claim 7, further comprising the steps of:
 producing signals representative of audio signals received at selected ones of the different spatial perspectives.

- 20 11. A method of generating a television image, said method comprising the steps of:

- producing a plurality of video images of an object of interest from a plurality of spatial perspectives;
 displaying one of said video images for a period of time;
 selecting a frame in the displayed video image; and
25 switching the displayed video image among a plurality of corresponding frames of said plurality of video images to display the object of interest from multiple spatial perspectives.

12. The method of claim 11, further comprising the steps of:
 displaying another one of the plurality of video images.

- 30 13. A method of generating a television image, said method comprising the steps of:

producing a plurality of video images of an object of interest from a plurality of spatial perspectives;

displaying one of said video images for a period of time; and

switching the displayed video image among said plurality of video
5 images to display the object of interest from multiple spatial perspectives.

ABSTRACT OF THE DISCLOSURE

A video imaging system includes a master video camera for producing video images of a moving object of interest, a plurality of additional video cameras each positioned at a different location for producing additional video images of the object of interest from different spatial perspectives, and a control system for controlling the additional video cameras to track the object of interest imaged by the master video camera. The system generates video images using a method comprising the steps of producing a master video image of a moving object of interest, producing additional video images of the object of interest from different spatial perspectives, and controlling size of the object of interest in the additional video images in response to the size of the object of interest in the master video image. The invention further encompasses a method of presenting a video image comprising the steps of producing a plurality of video images of an object of interest from a plurality of spatial perspectives, displaying one of said video images for a period of time, selecting a frame in the displayed video image, and switching the displayed video image among a plurality of corresponding frames of said plurality of video images to display the object of interest from multiple spatial perspectives, giving the illusion of a single camera moving around the frozen object(s). This invention further encompasses the recording of point sound source by placing microphones at the cameras such that the microphones receive sound waves from the direction of the field of view of the cameras, and processing audio signals produced by these microphones to produce an audio output signal representative of sound being produced at a particular location in the area occupied by an event being recorded.

1/8

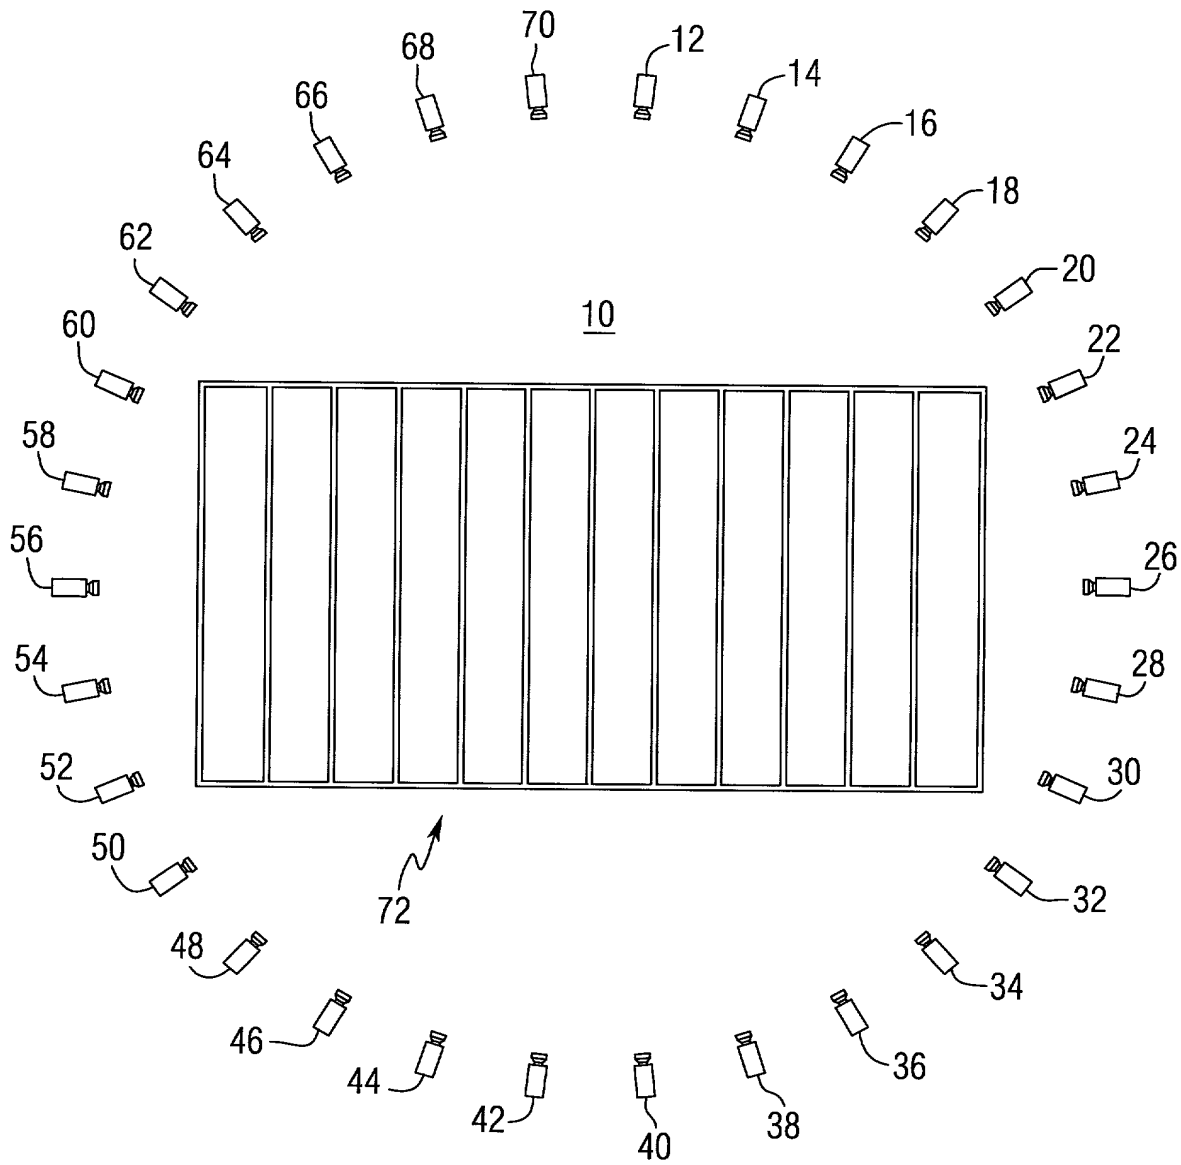


FIG. 1

2/8

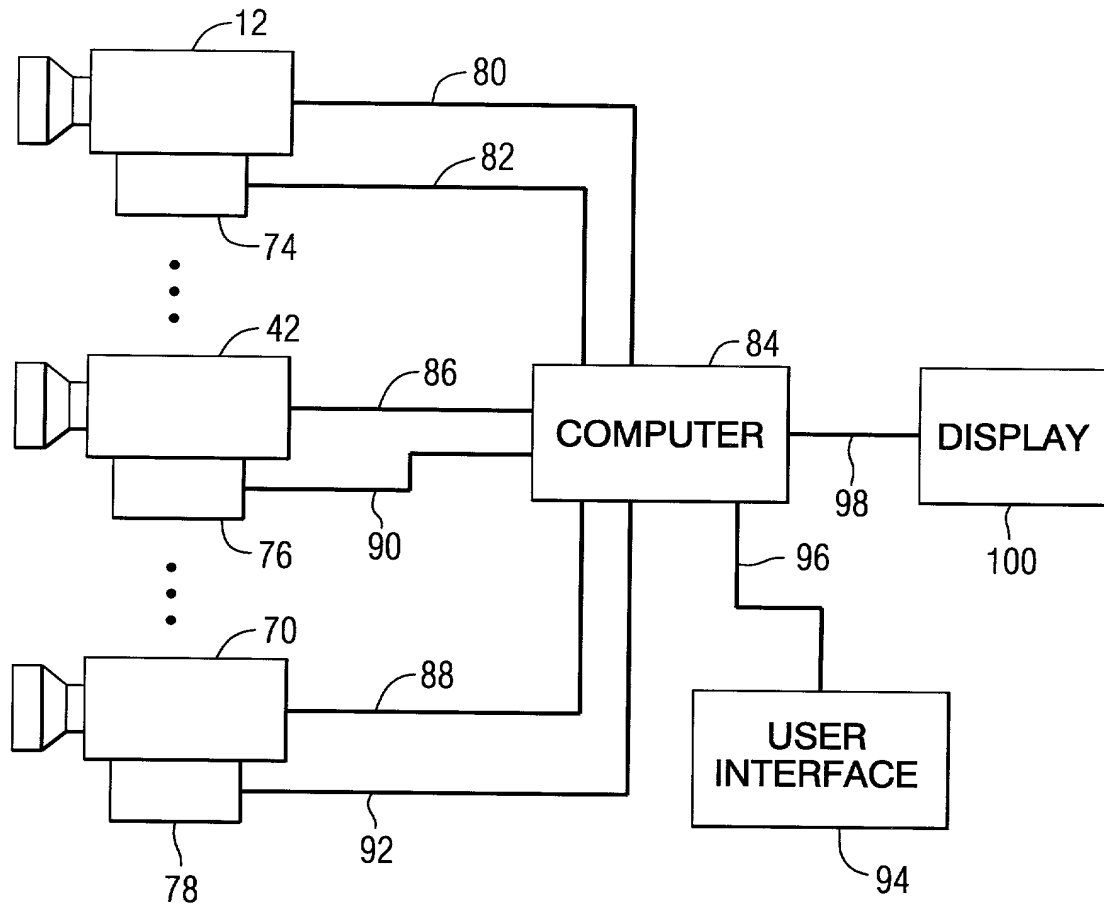


FIG. 2

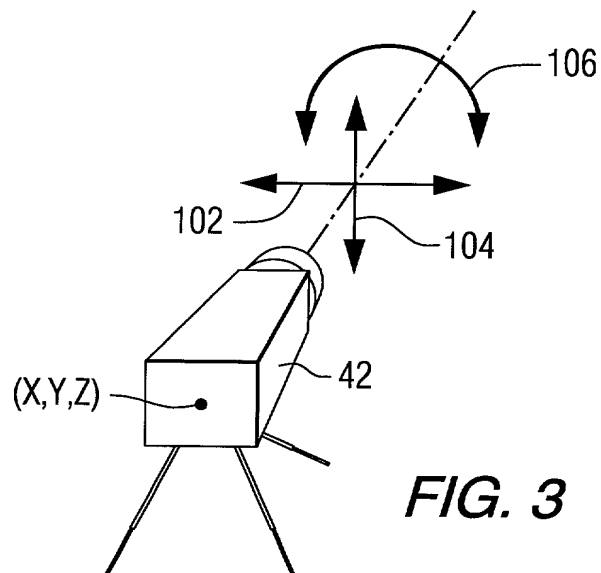
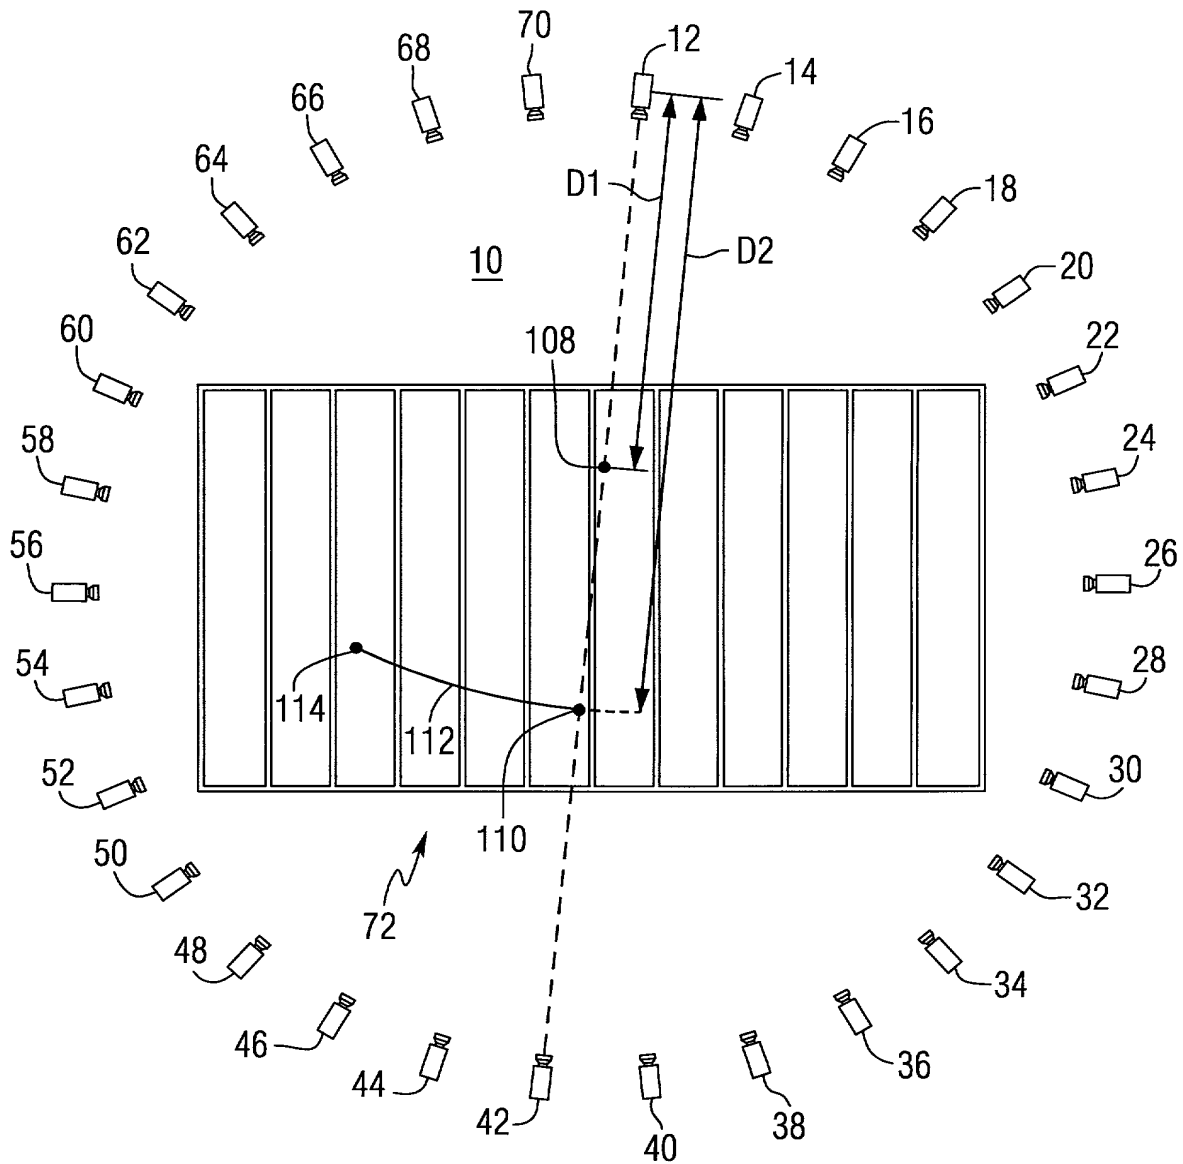


FIG. 3

**FIG. 4**

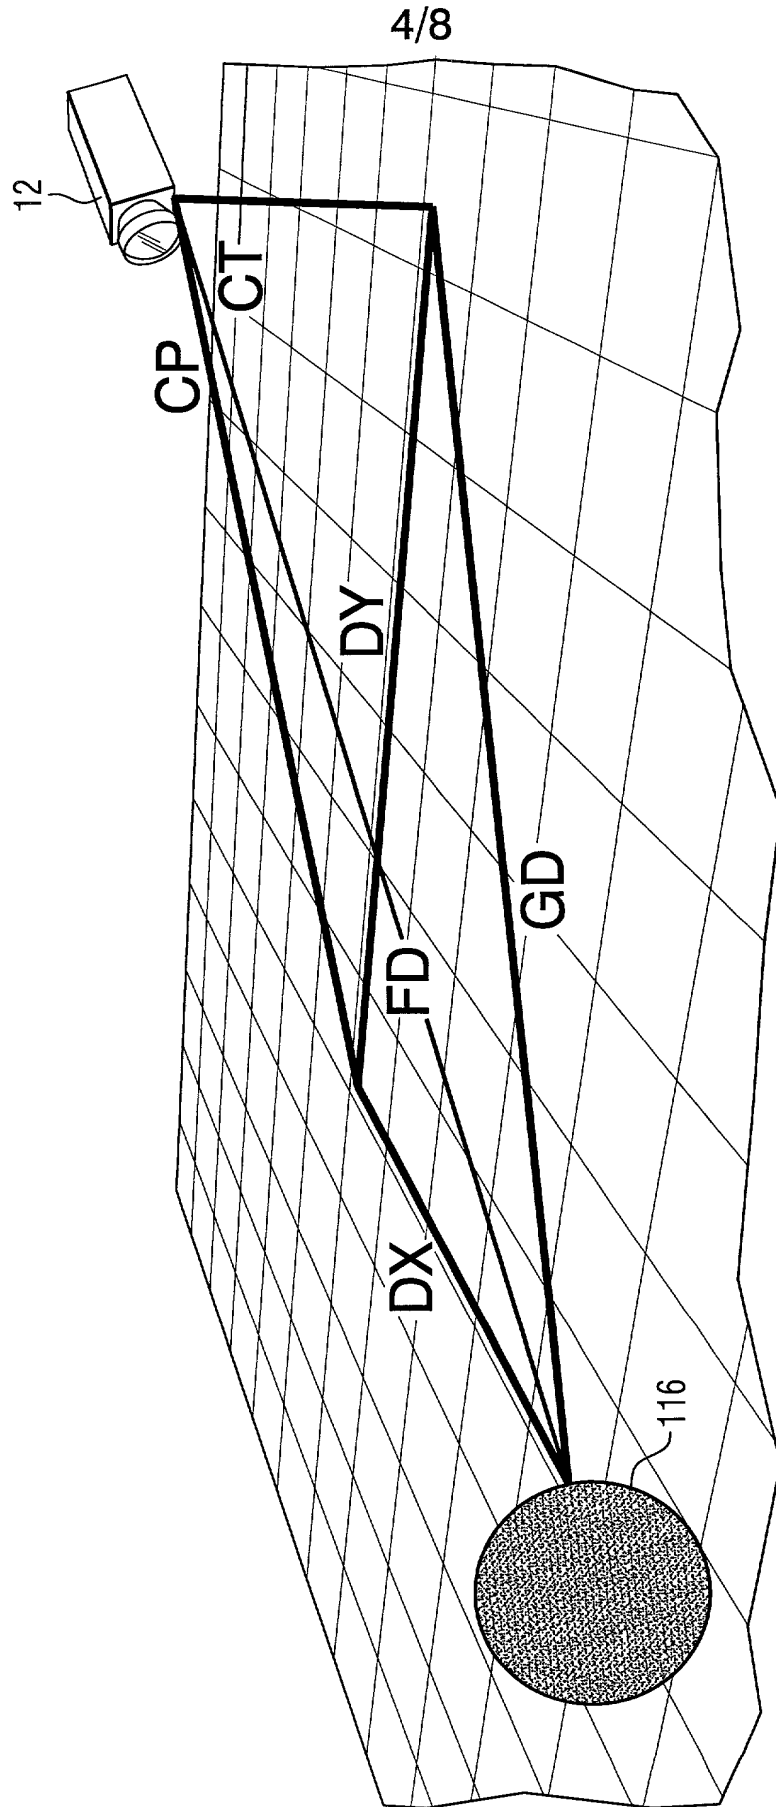


FIG. 5

5/8

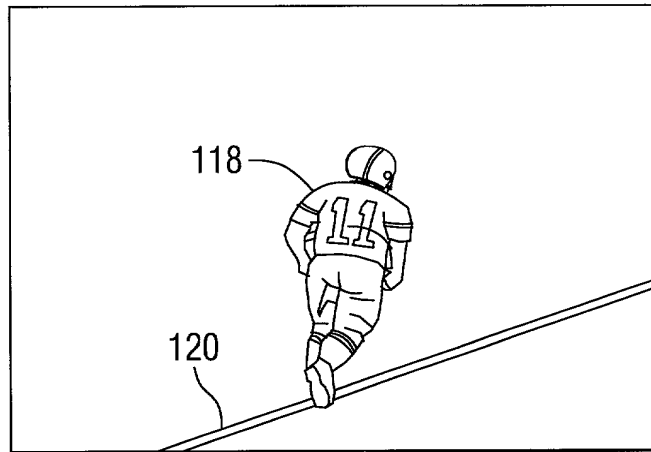


FIG. 6a

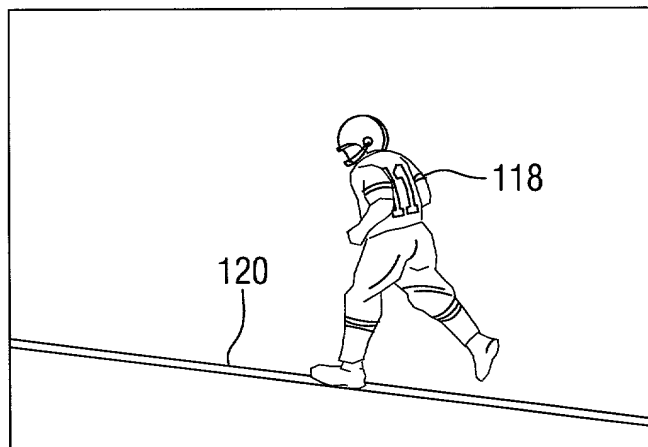


FIG. 6b

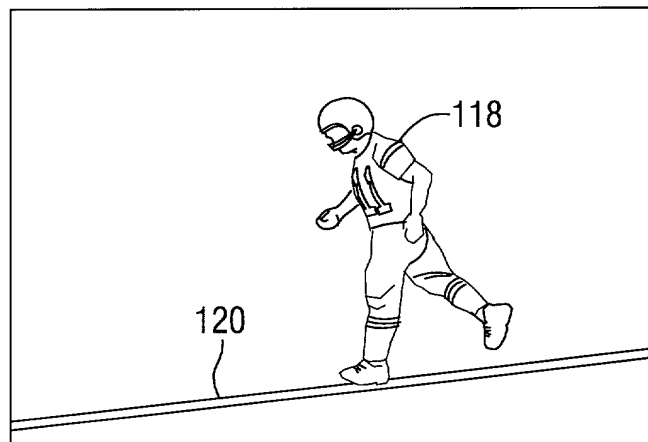


FIG. 6c

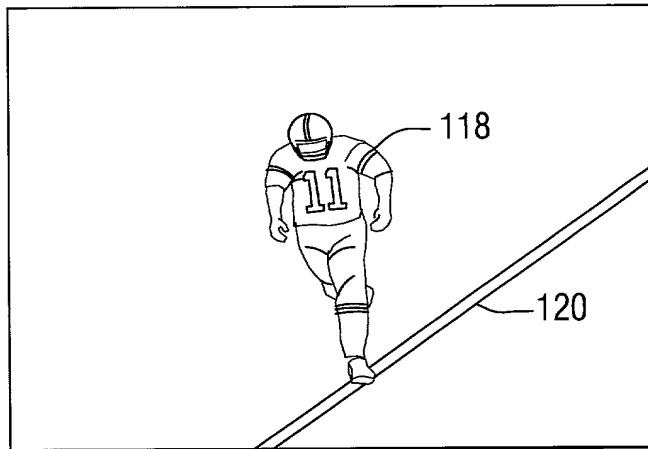


FIG. 6d

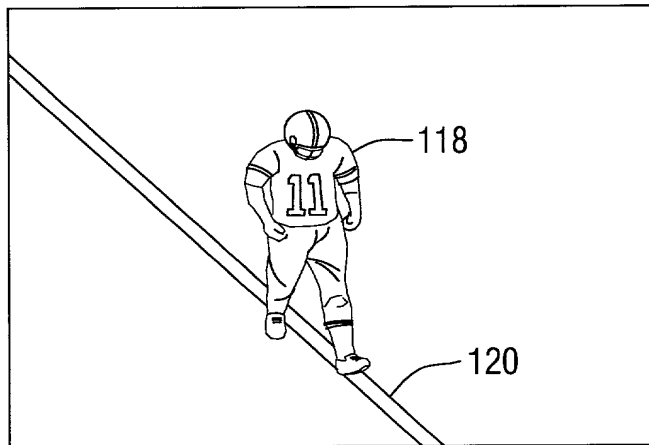


FIG. 6e

7/8

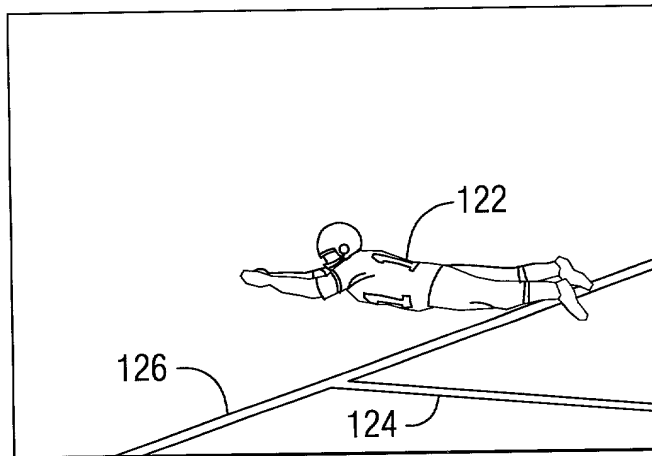


FIG. 7a

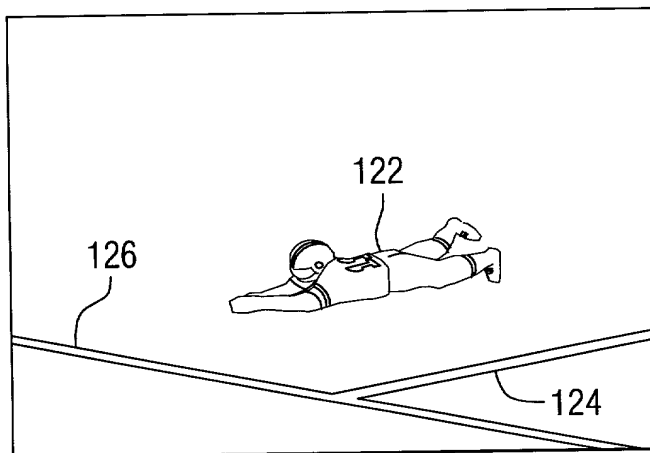


FIG. 7b

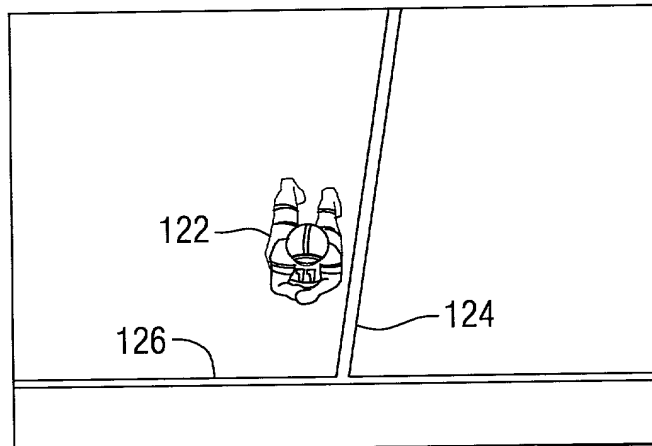


FIG. 7c

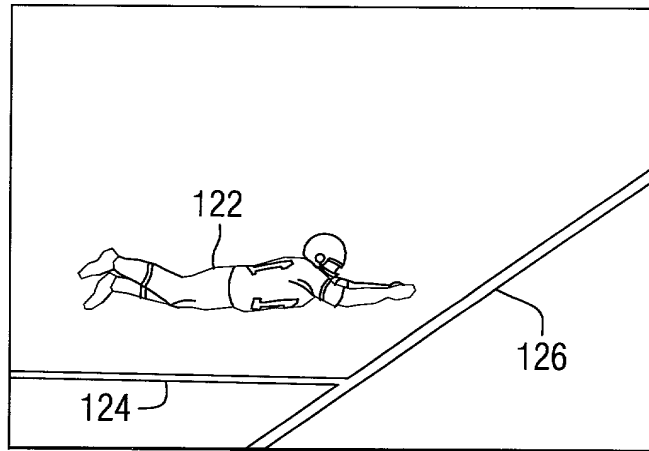


FIG. 7d

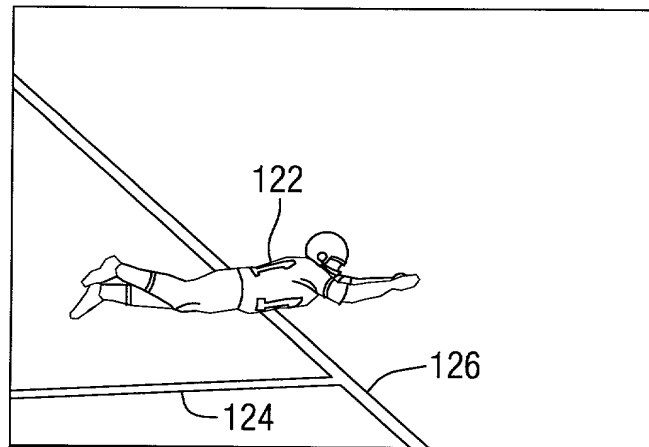


FIG. 7e

Please type a plus sign (+) inside this box → +

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	CBS 2000-01
	First Named Inventor	Kenneth John Aagaard
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

VIDEO SYSTEM AND METHOD OF OPERATING A VIDEO SYSTEM

the specification of which (Title of the Invention)
☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement. This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Customer Number 003705

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here


Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label ☐ OR ☒ Correspondence address below

Name	Robert P. Lenart				
Address	Eckert Seamans Cherin & Mellott, LLC				
Address	600 Grant Street, 44th Floor				
City	Pittsburgh	State	PA	ZIP	15219
Country	US	Telephone	(412) 566-1252	Fax	(412) 566-6099

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])		Family Name or Surname			
Kenneth John		Aagaard			
Inventor's Signature				Date	7/25/00
Residence: City	Guttenberg	State	NJ	Country	US
Citizenship	US				
Post Office Address	CBS Sports				
Post Office Address	51 West 52nd Street				
City	New York	State	NY	ZIP	10019-6188
Country	US				

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → +




PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet

Page 1 of 1

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Larry				Barbatsoulis			
Inventor's Signature				Date	7/25/00		
Residence: City	Long Beach	State	NY	Country	US	Citizenship	US
Post Office Address CBS Sports							
Post Office Address 51 West 52nd Street							
City	New York	State	NY	ZIP	10019-6188	Country	US
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Sean Joseph				McManus			
Inventor's Signature				Date	7/25/00		
Residence: City	New Canaan	State	CT	Country	US	Citizenship	US
Post Office Address CBS Sports							
Post Office Address 51 West 52nd Street							
City	New York	State	NY	ZIP	10019-6188	Country	US
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Craig Matthew				Farrell			
Inventor's Signature				Date	7/26/00		
Residence: City	Little Rock	State	AR	Country	US	Citizenship	US
Post Office Address 15100 Chambery Drive							
Post Office Address							
City	Little Rock	State	AR	ZIP	72211	Country	US

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.